



LAST REVISED: 01/2022

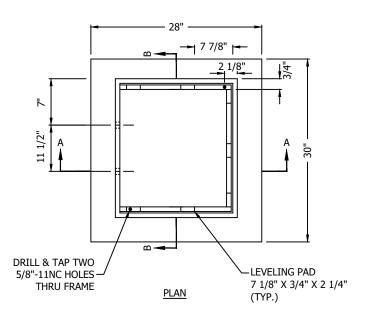



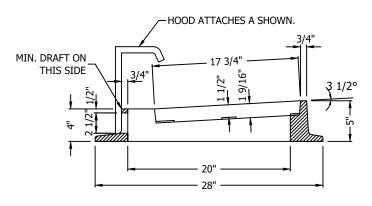


SECTION A-A



NOTES:

- FRAME AND COVER SHALL BE EAST JORDAN IRON WORKS OR EQUAL, SUBJECT TO APPROVAL BY CITY. MATERIAL SHALL CONFORM TO SECTION 9-05.15(2) OF THE STANDARD SPECIFICATION.
- PATTERN ON TOP SURFACE SHALL SPECIFY THE FISH LOGO AND DUMP NO POLLUTANTS (NO DIAMOND PATTERN).
- 3. BOLT, WASHER, AND NUT SHALL BE GALVANIZED OR CORROSION RESISTANT. BOLTS SHALL BE INSERTED INTO THE FACE OF THE HOOD WITH WASHER AND NUT SECURED TO THE BACK SIDE OF THE HOOD.
- USE APPROPRIATE GRATE DEPENDING ON THE DIRECTION OF FLOW.
- 5. NO HORIZONTAL CROSS BAR IN THE OPENING.
- 18" X 24" VANED OR BI-VANED LID. APPLICATION OF THIS DETAIL NOT TO REPLACE FUNCTION OF CK-D.14.
- 7. MUST BE MADE IN THE USA.
- TROWELED EDGE MUST BE IN CONTACT WITH FRAME (RATHER THAN EXPANSION JOINT).



CITY OF KIRKLAND

PLAN NO. CK - D.15



OPEN CURB FACE FRAME AND GRATE DETAILS